

# Retrofit Cathodic Protection



The Piranha® is intended for mounting to plates and rods


- ROV operated
- Fast installation
- Strong mechanical hold
- Several tons of clamping force
- Excellent electrical connection
- Typically 0,05 mΩ resistance
- Suitable for both retrofit to existing structures and new projects
- Field proven solution
- More than 1000 connectors installed
- 15 year track record
- Offshore wind track record
- 8 offshore wind projects last two years
- 482 offshore wind turbine foundations
- 2 substation foundations

For further information, email  
[commercial@imenco.com](mailto:commercial@imenco.com)

# Retrofit Cathodic Protection



## Installation sequence

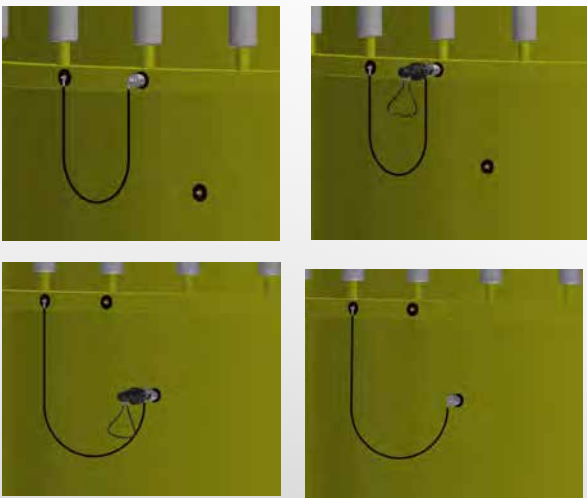

## Imenco Earthing Connector Range

### Extensive range for connection to:

- Plate: Piranha®
- Rod/Bolt:
- Tubular:
- Piranha®
- Anaconda®
- Subsea Pipeline: Payara®
- Stand-off anodes: Caiman®